


**TPS 310, power supply pack for wall/standard rail fitting**

- Power supply for wall or standard-rail mounting
- Ideally matched to HiPace 300 with TC 400
- Mounting kit included in scope of delivery

**Dimensions**

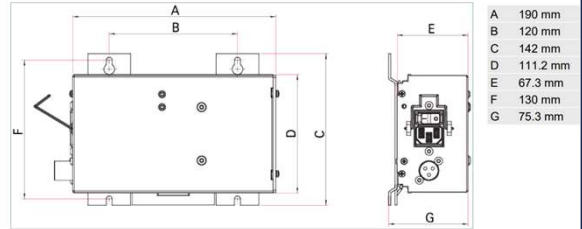

Technical Data	TPS 310, power supply pack for wall/standard rail fitting
Ambient temperature	5-50 °C   41-122 °F   278-323 K
External power supply pack	TPS 310
Input voltage(s)	100 – 240 V AC (±10 %), 50/60 Hz
Mains frequency compatibility	50 Hz 60 Hz
Motor for region	Worldwide
Output current	12.5 A
Output voltage	24 (±2 %) V DC
Power consumption max	345 VA

**PFEIFFER AIR COOLING FOR HIPACE 300 WITH TC 40**

ITEM#: PN06089 MFR PART#: PMZ01302A / PM Z01 302 A MANUF

**D-35614**



**HiPace 300**



**HiPace® 300 P with TC 400, DN 100 ISO-K**

Order number: PM P04 710

- Rugged, powerful turbopump with a pumping speed of up to 245 l/s for N<sub>2</sub>
- Integrated drive electronics TC 400
- Perfect solution for coating and semiconductor processes as well as for dusty industrial applications like electron-beam welding facilities
- For installation in any orientation
- With integrated water cooling for maximum gas throughput
- Flexible through the ability to employ up to 4 accessories
- Ideal for fast cycles
- Extensive accessories expand the range of applications
- Insensitive to dust

 Request product

 Compare product

 Remember product